



FIG. 1

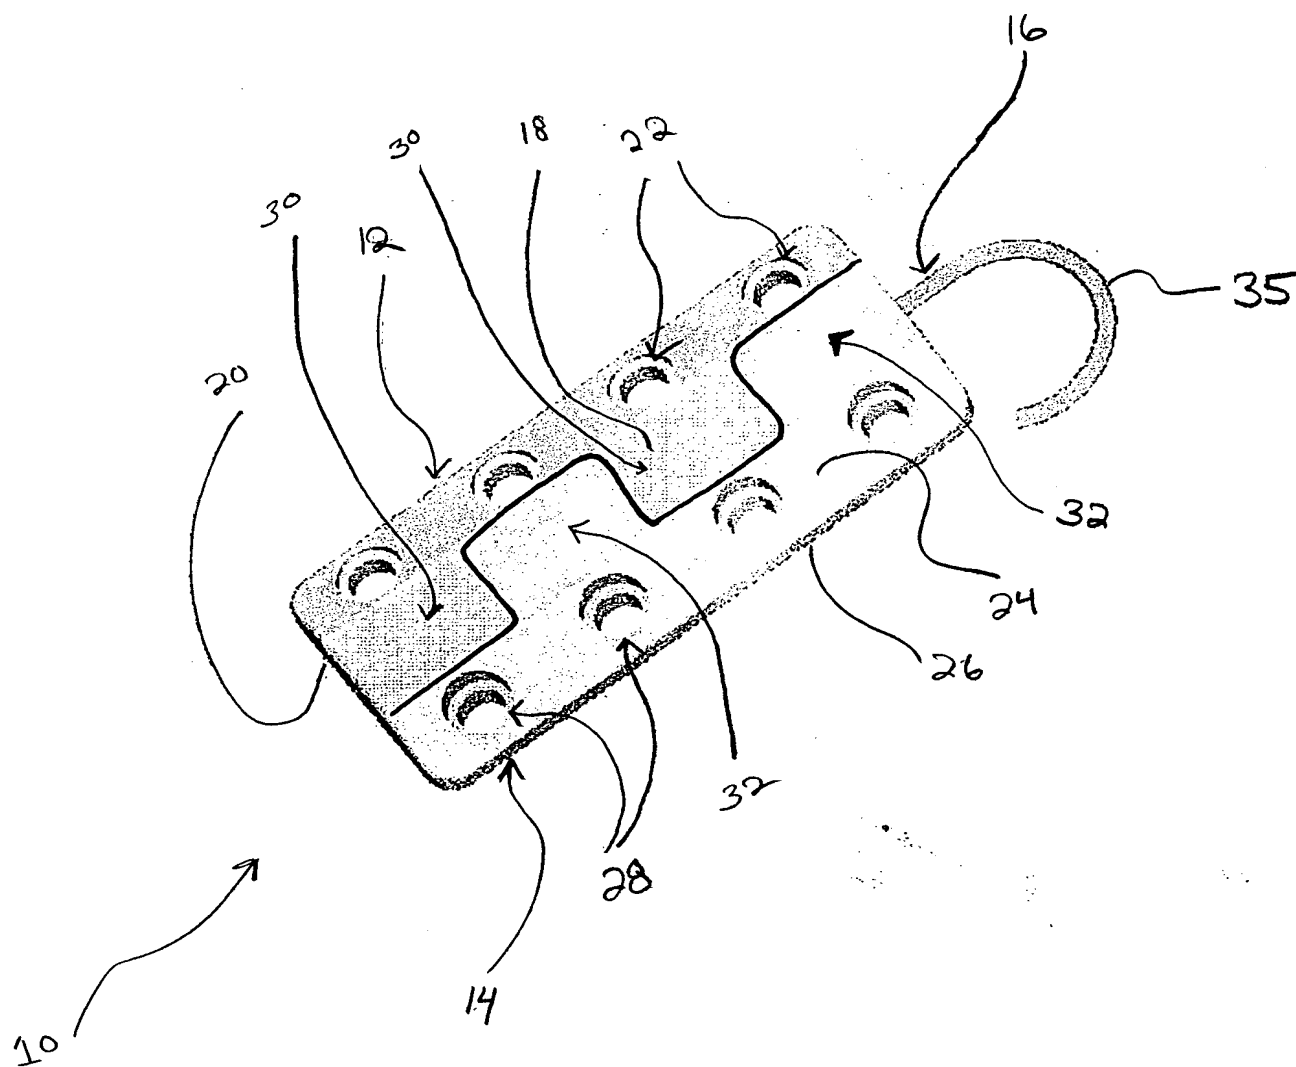


202420" EETEE2001

FIG. 2

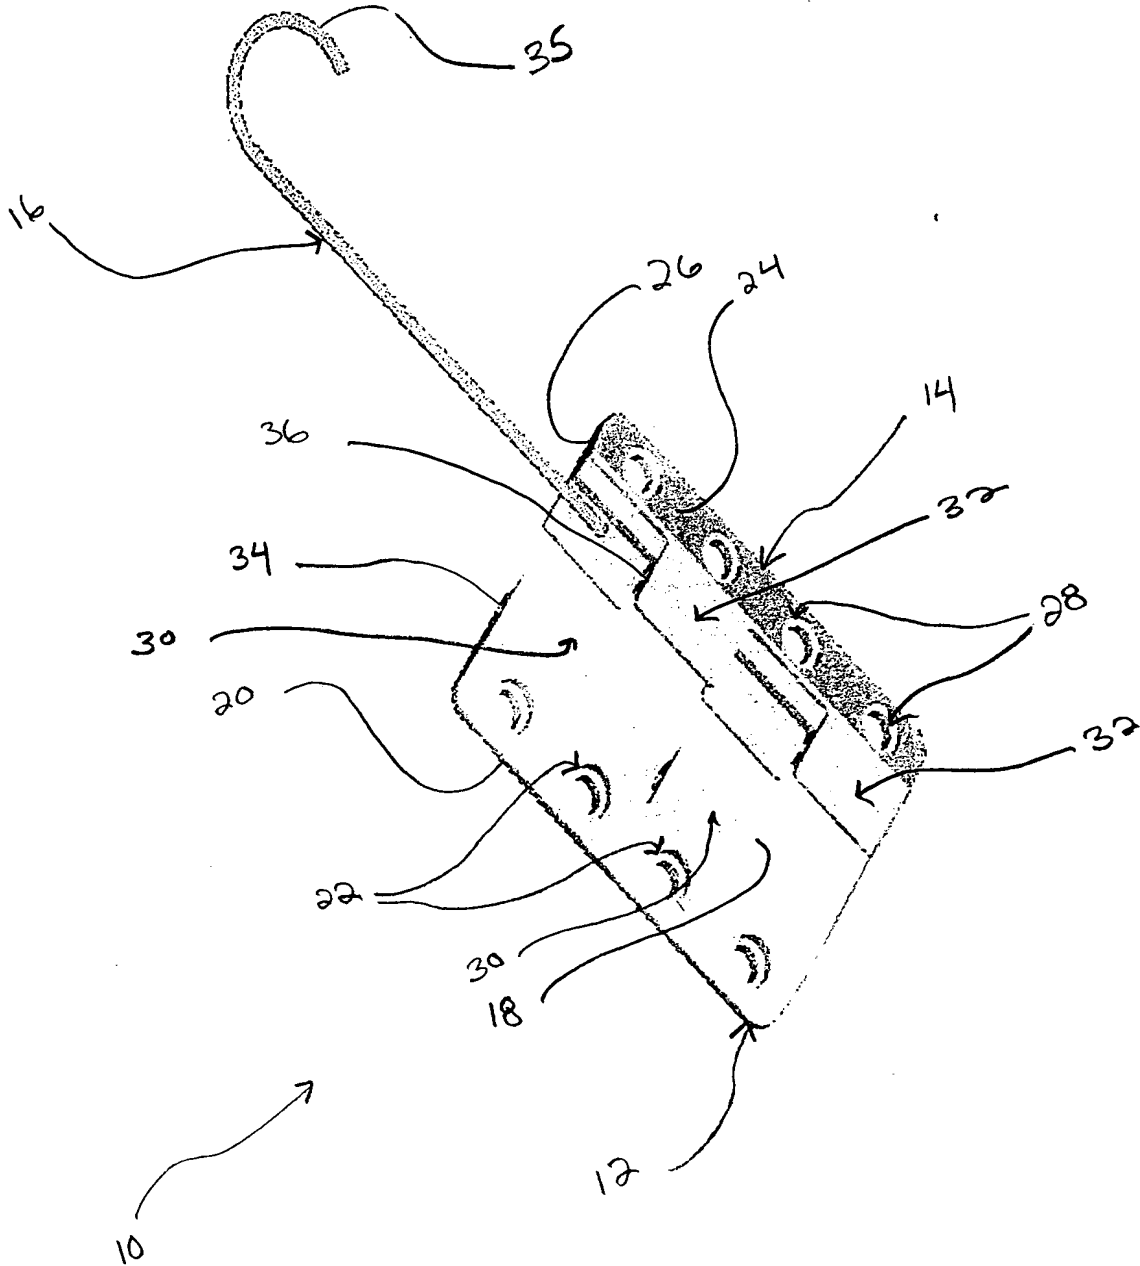

20073133-021302

FIG. 3

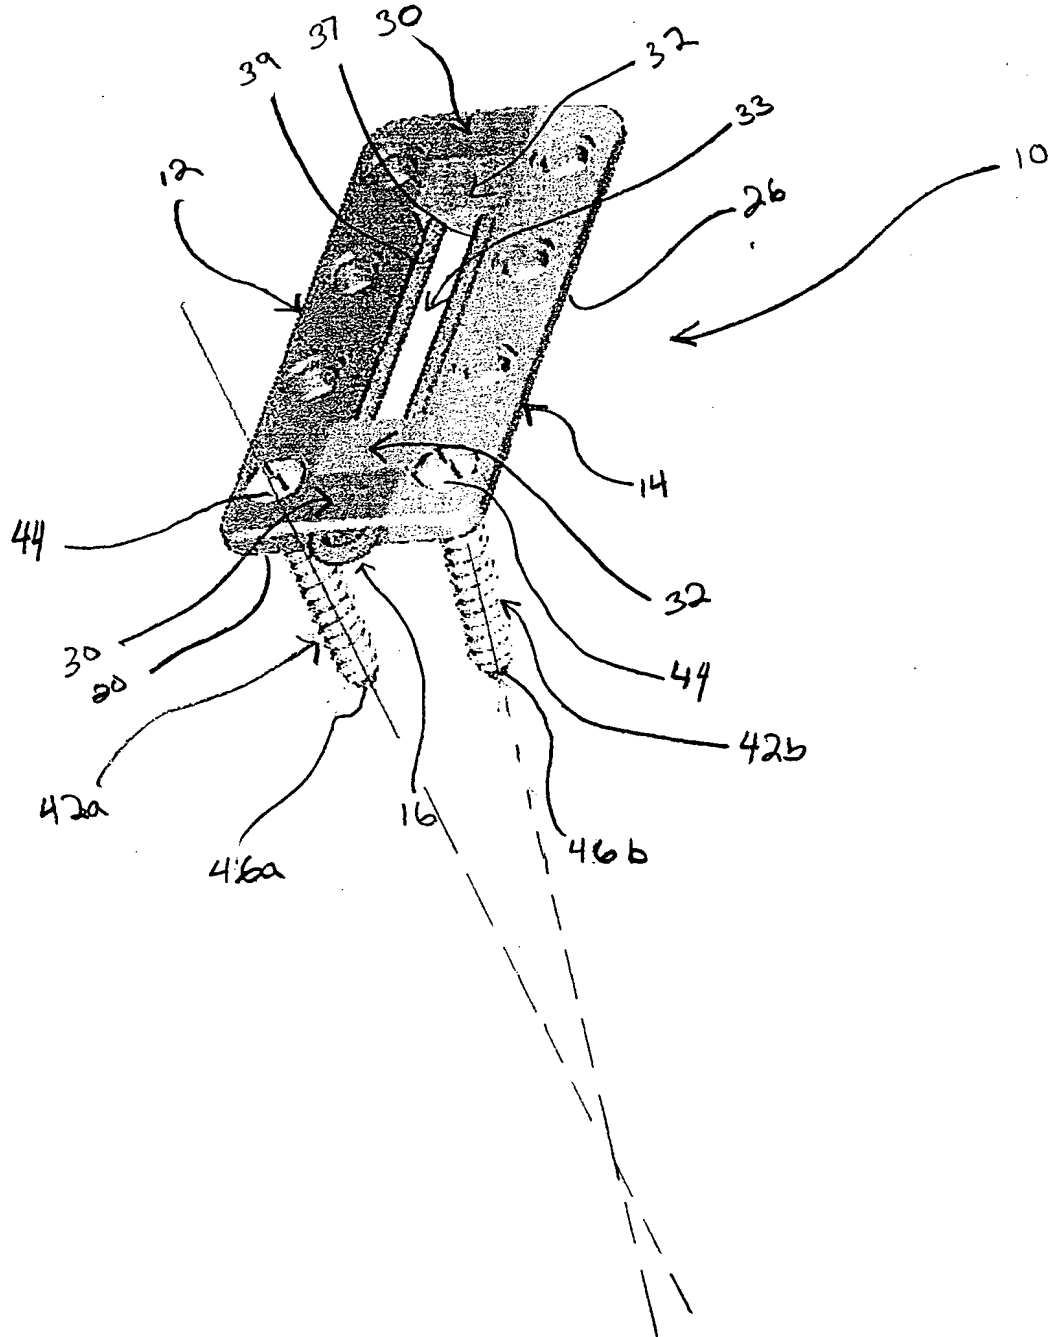

2007133-02302

This diagram shows an exploded perspective view of a mechanical assembly, designated by the reference numeral 10. The assembly includes a main elongated component 12, which has a rectangular body 20 and a flange 22 at one end. A separate component 26, which is a rectangular plate with a central slot 30, is positioned to be inserted into the flange 22. A third component 28, a rectangular plate with a central slot 32, is positioned to be inserted into the body 20. A fourth component 34, a rectangular plate with a central slot 36, is positioned to be inserted into the body 20. A fifth component 38, a rectangular plate with a central slot 40, is positioned to be inserted into the body 20. A sixth component 39, a long, thin, U-shaped member, is positioned to be inserted into the slot 30 of component 26. The components are shown in an exploded state, indicating their relative positions and how they fit together.

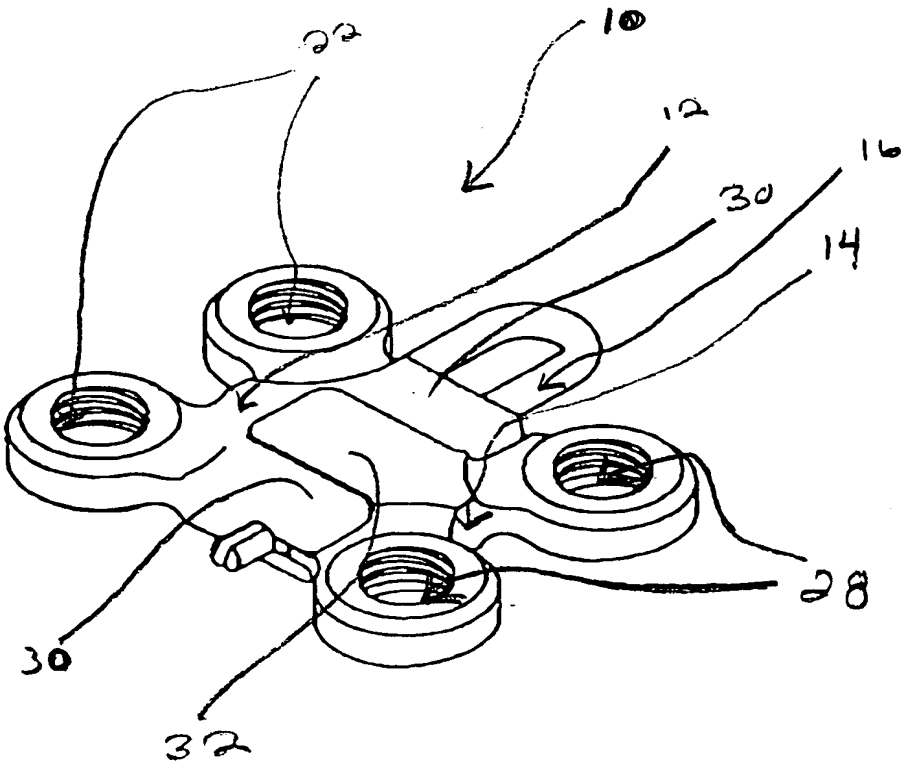
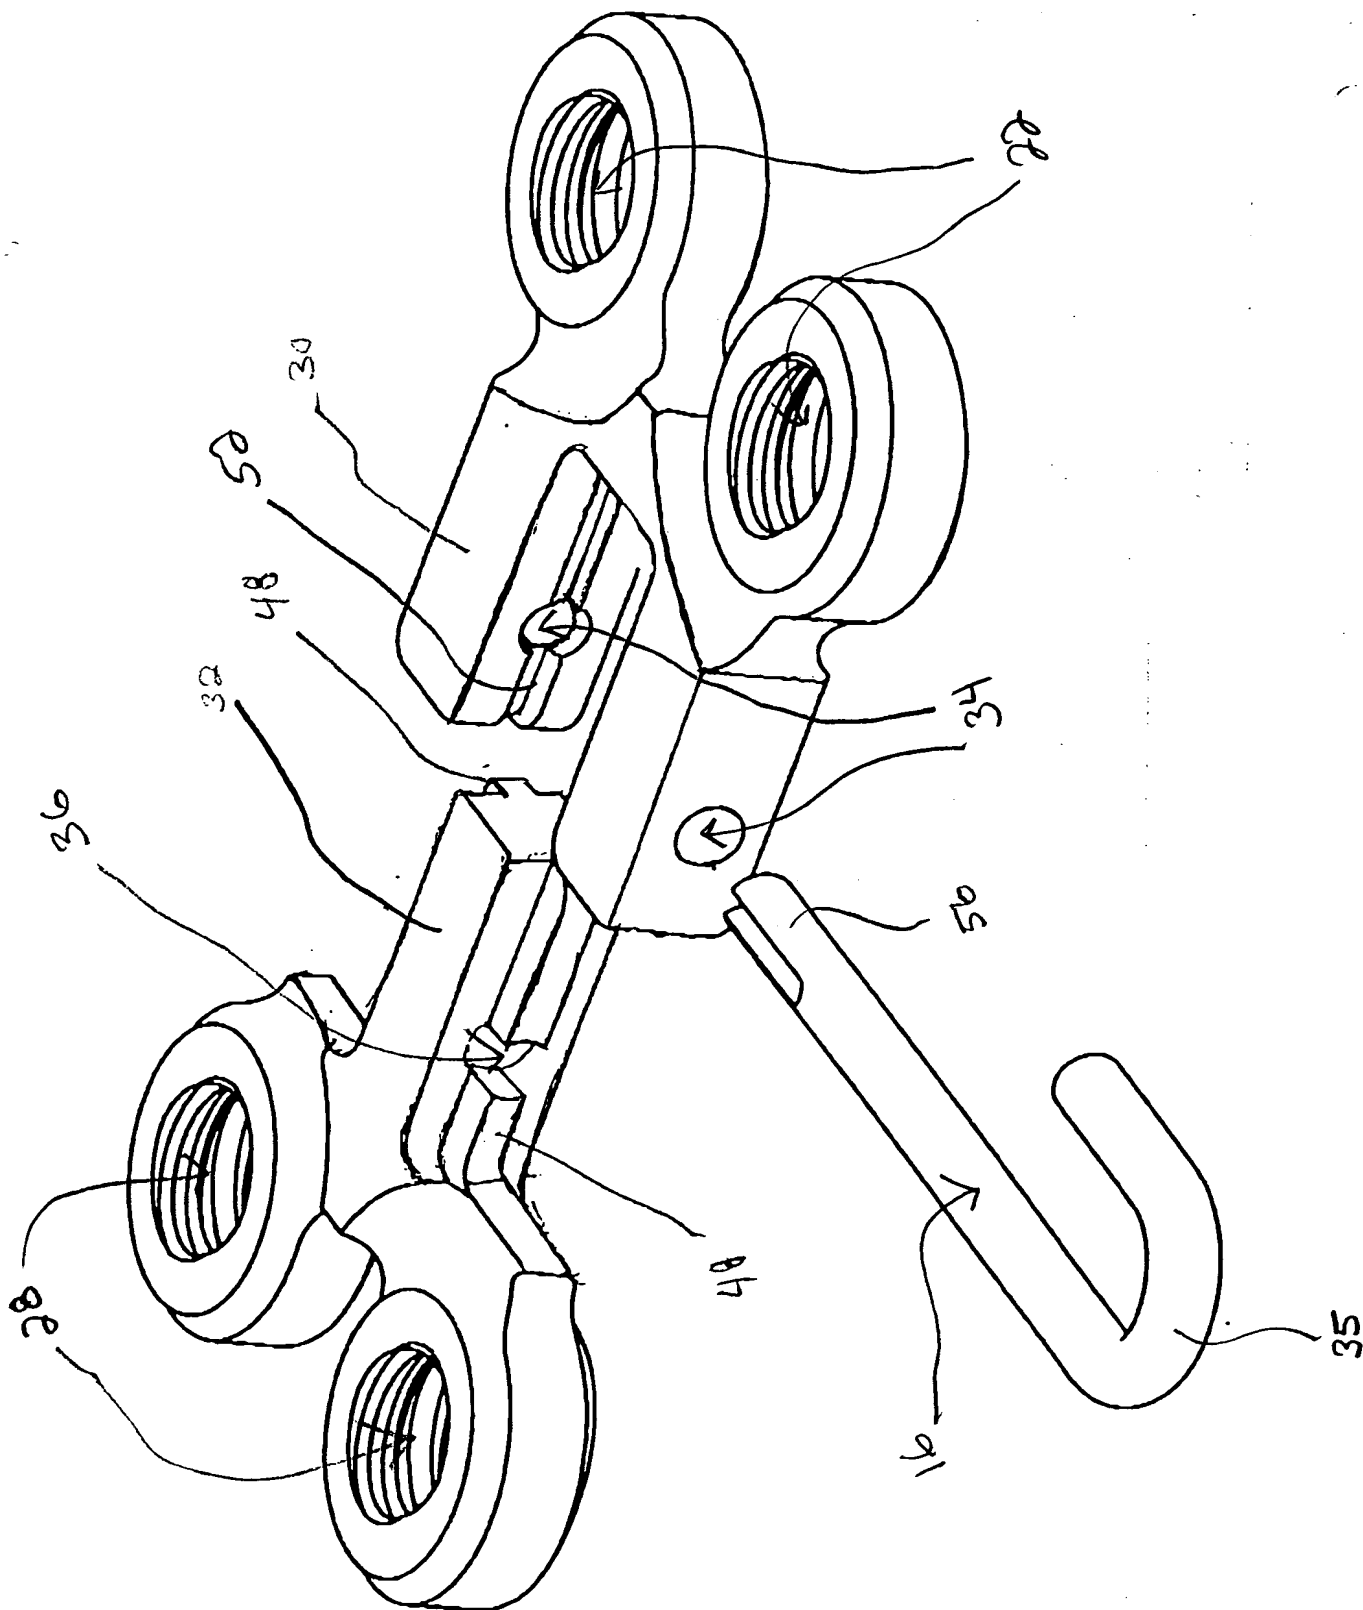


FIG. 5

2024133-021302



FIG. 7




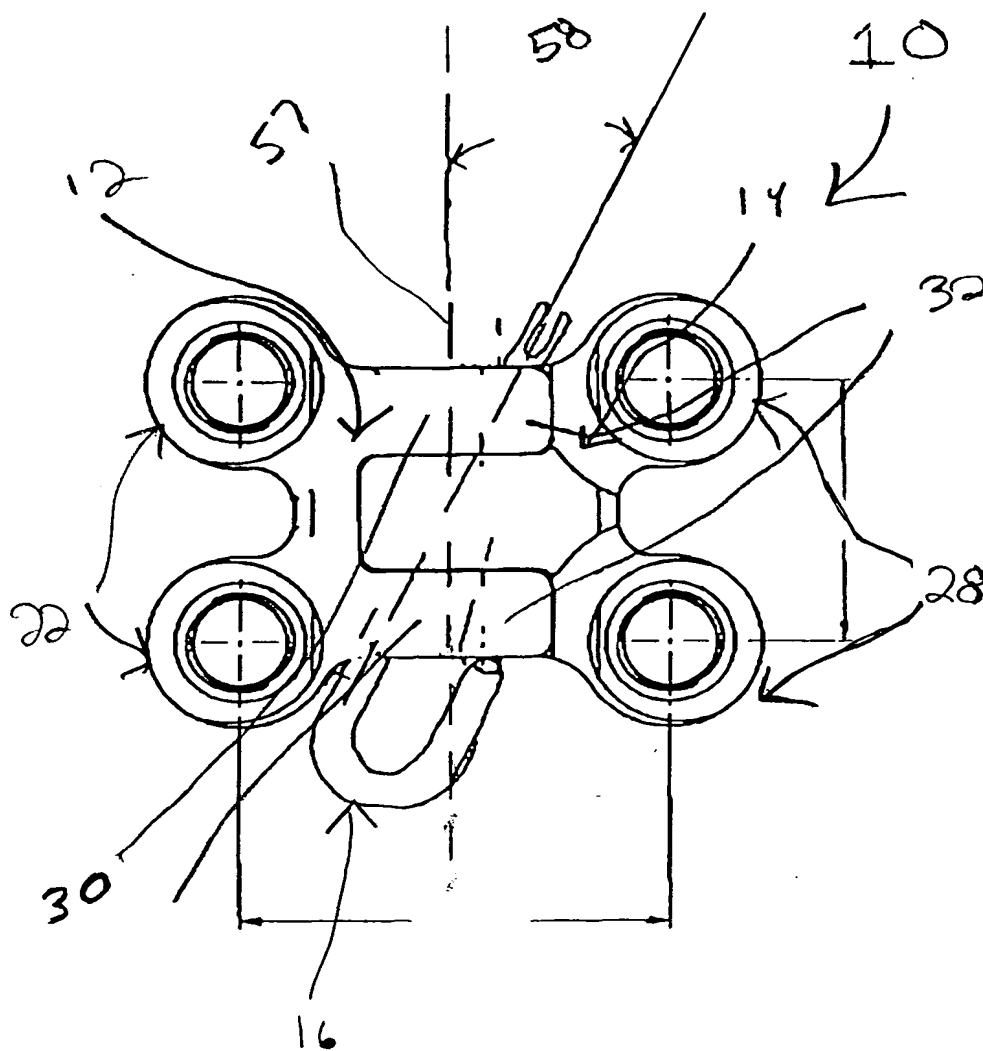


FIG. 8

20073433-021302

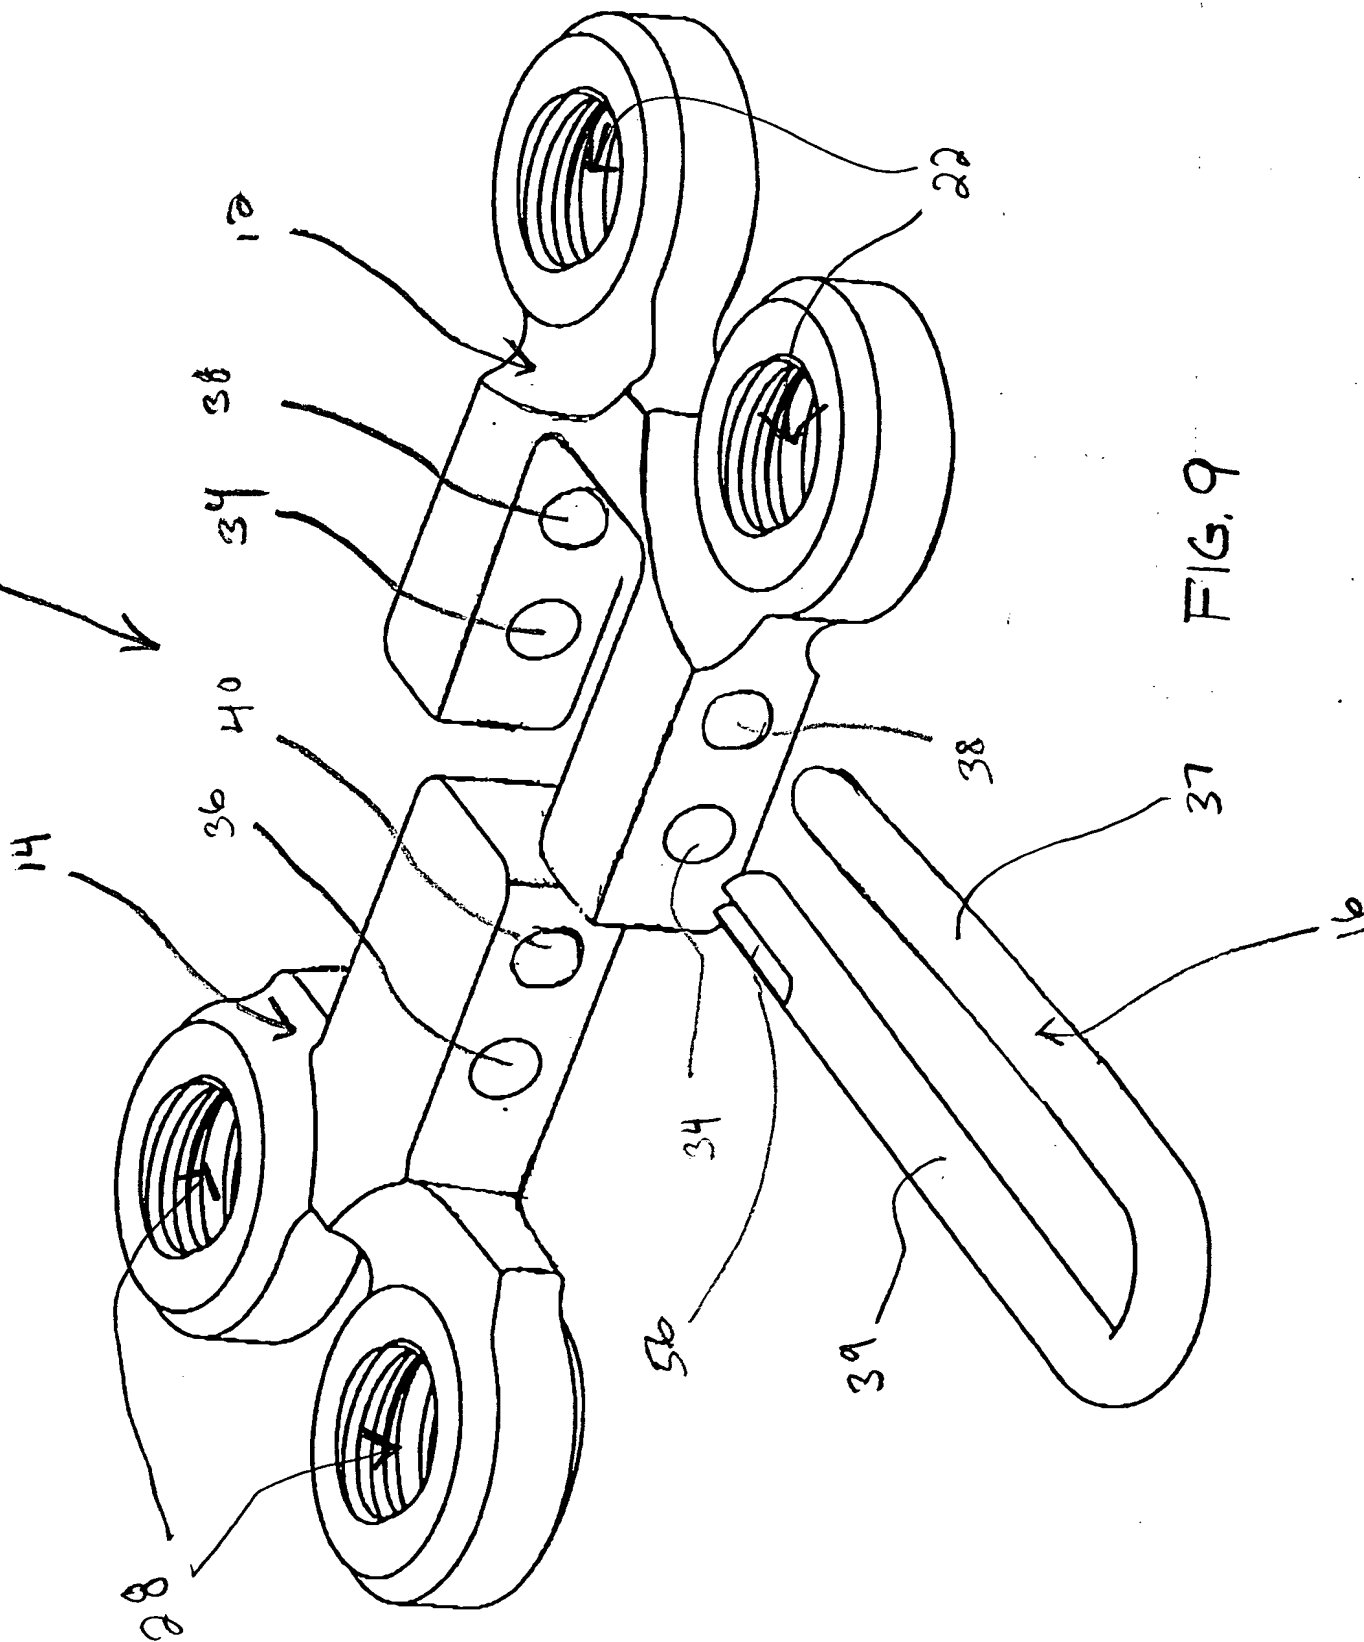

2007-02-20 10:20:00




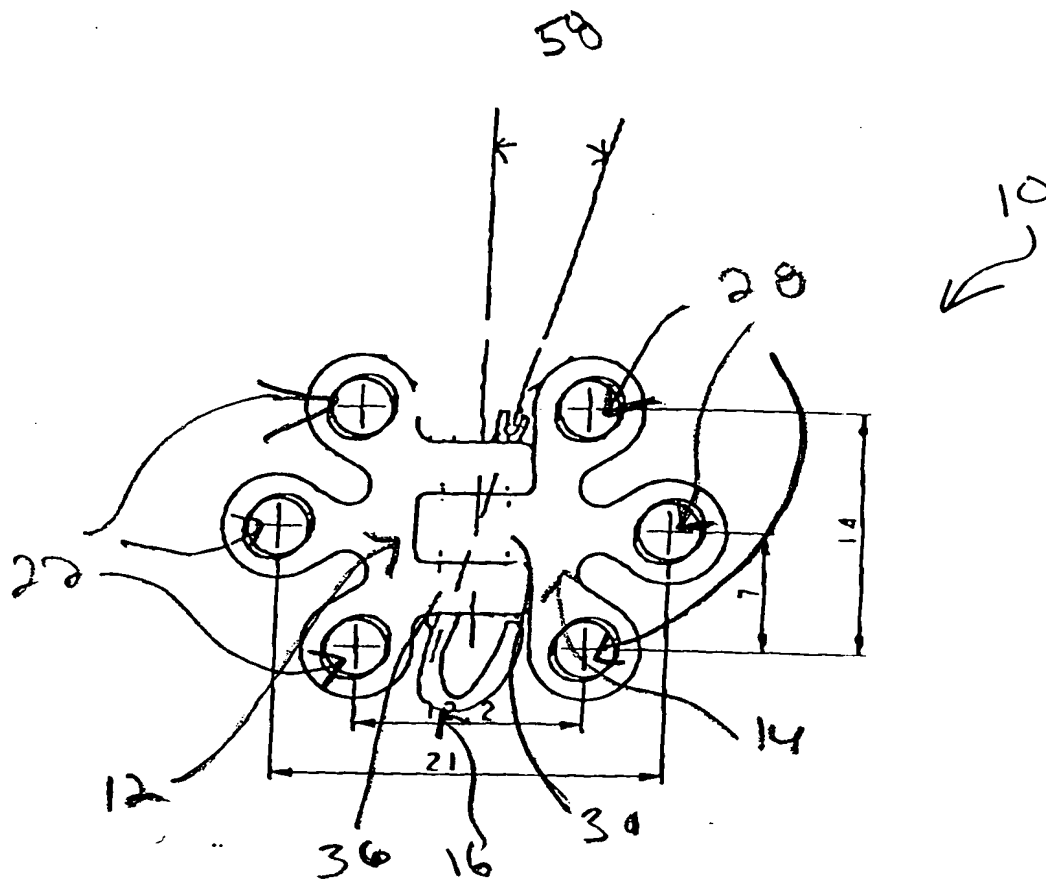


FIG. 10

2007220-0001

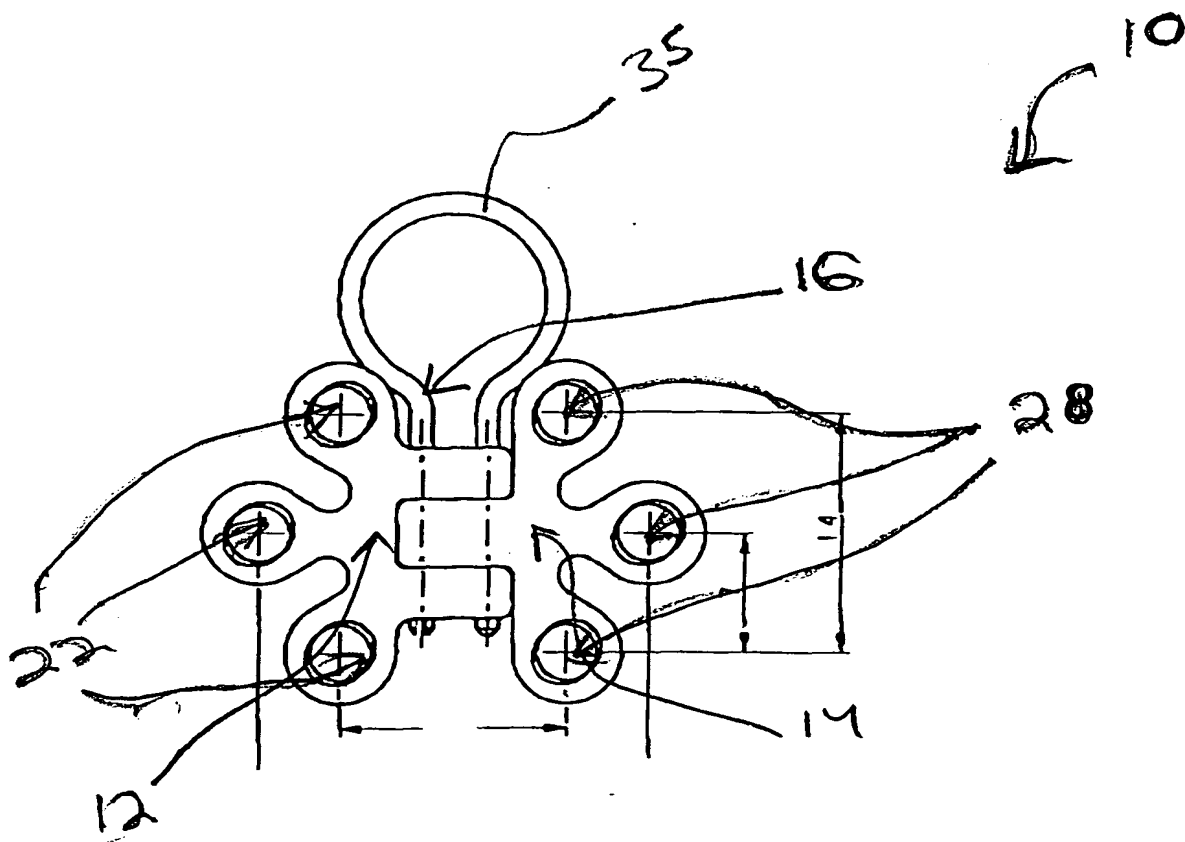

2007 FEB 20 00:00

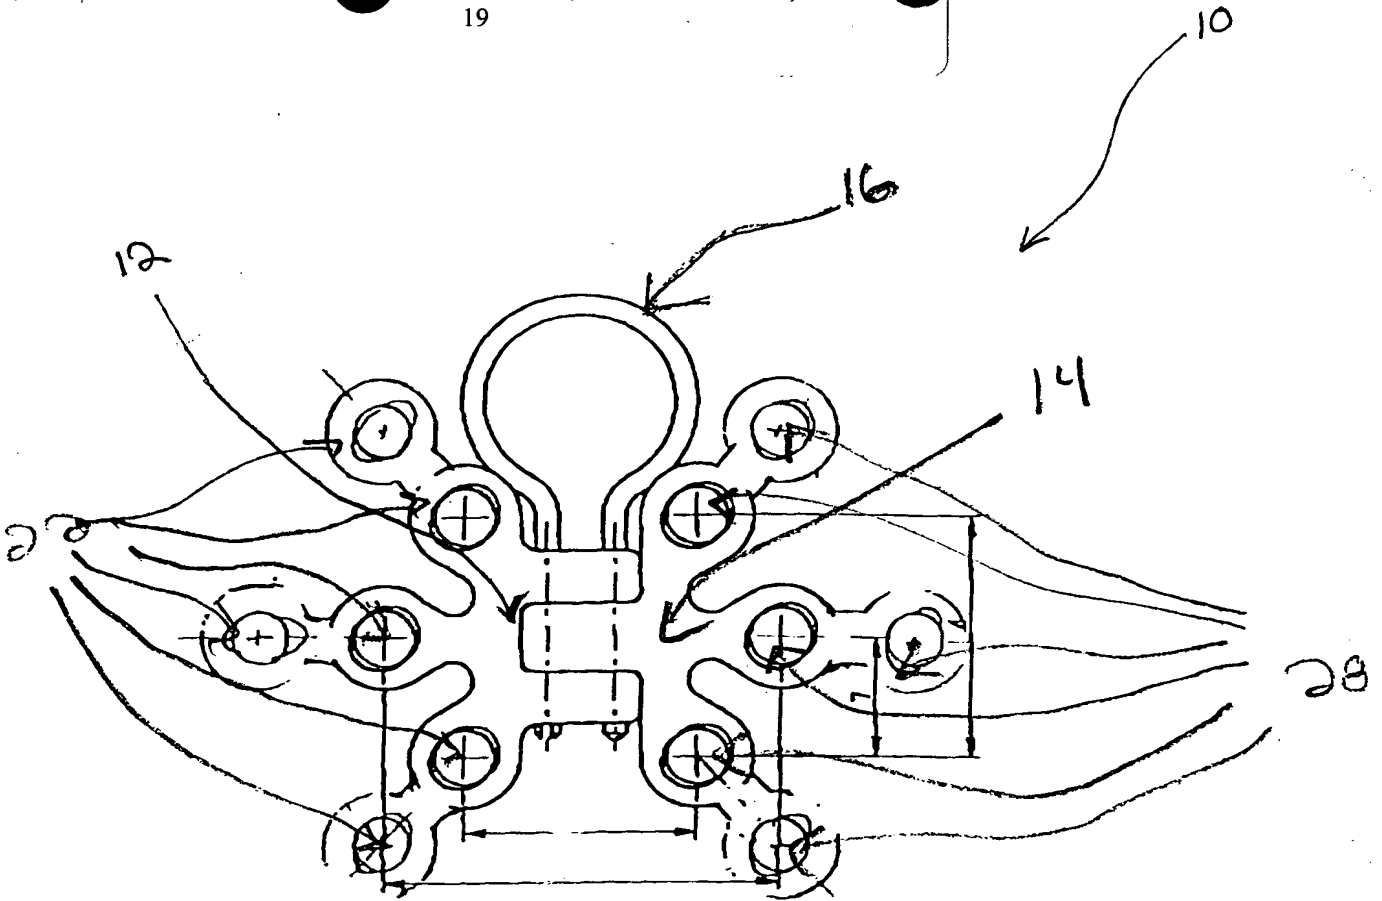


FIG. 12



FIG. 13


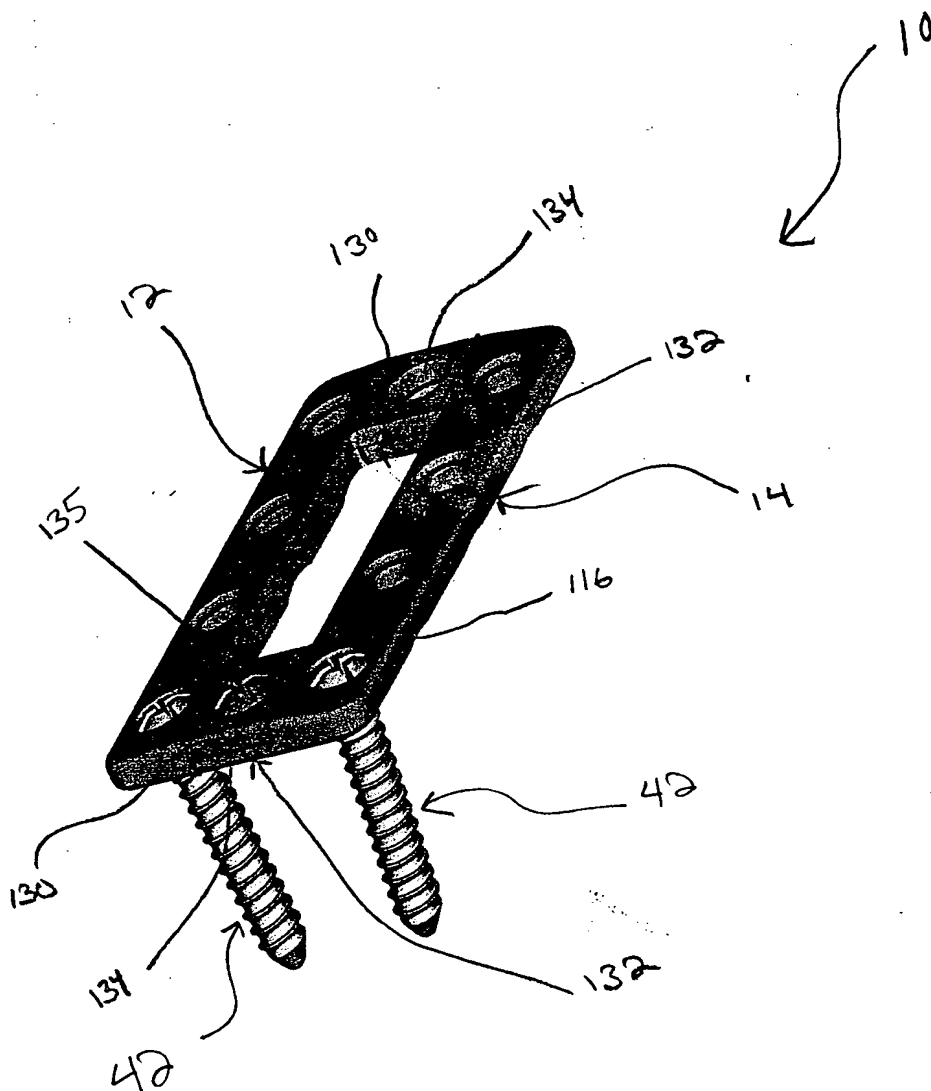


FIG. 14

20073133-021302

10073133.021302

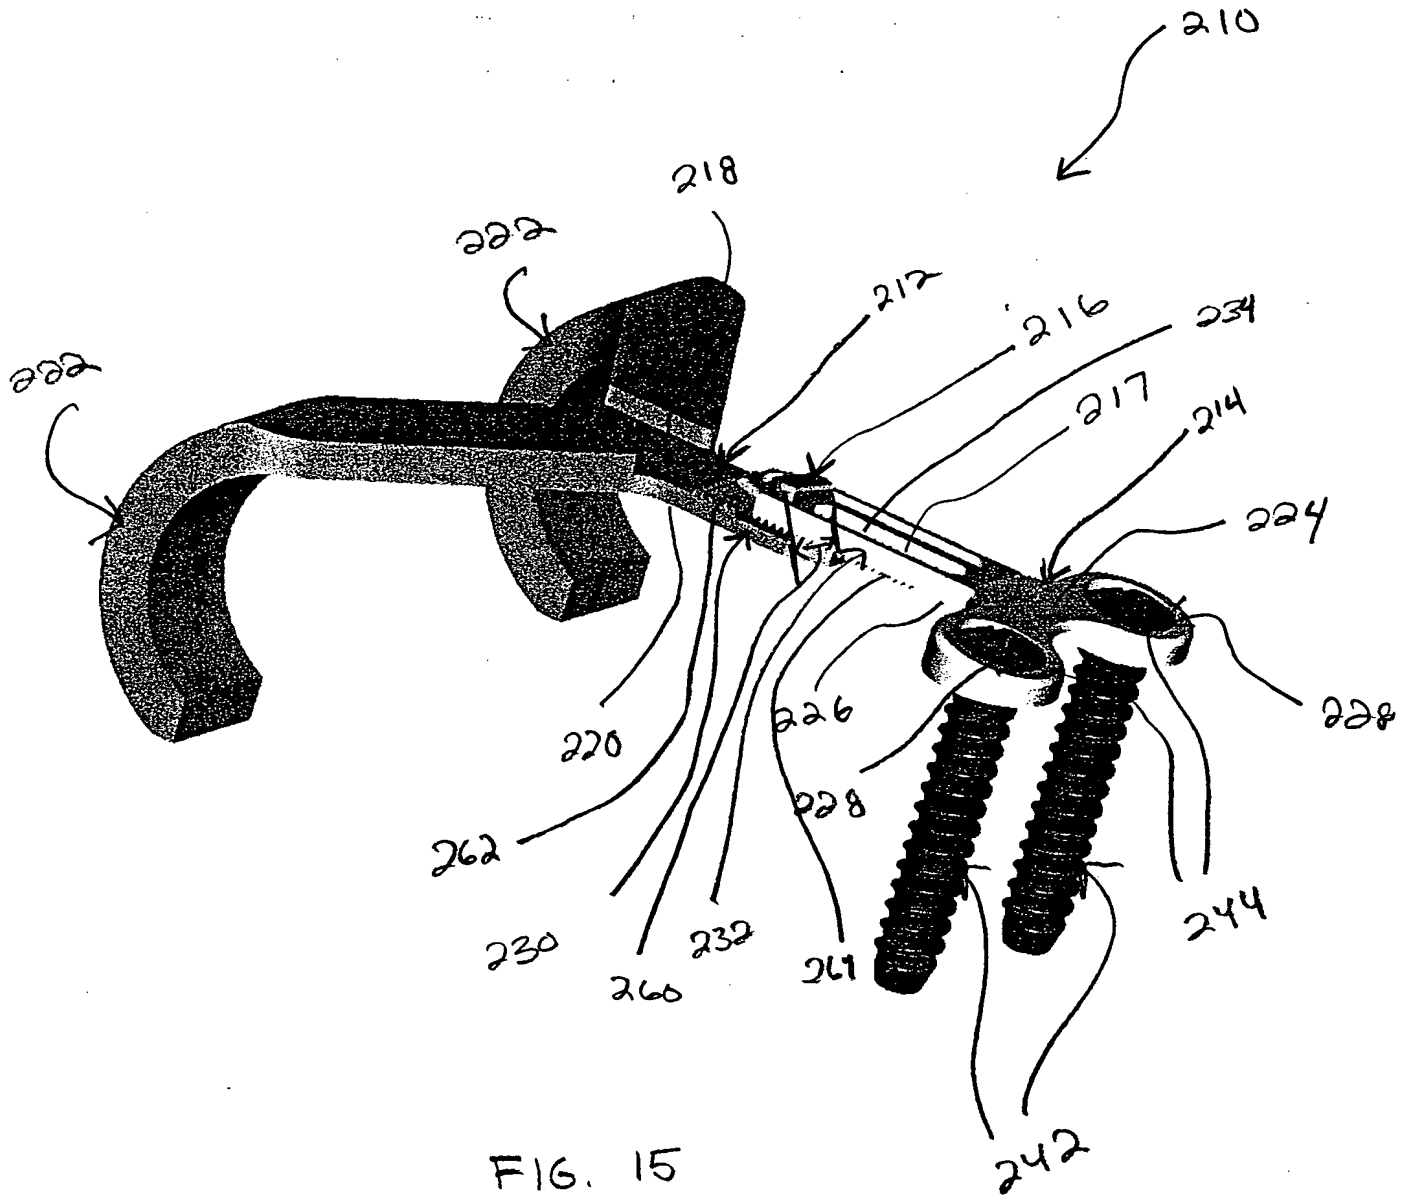

20073133.026302

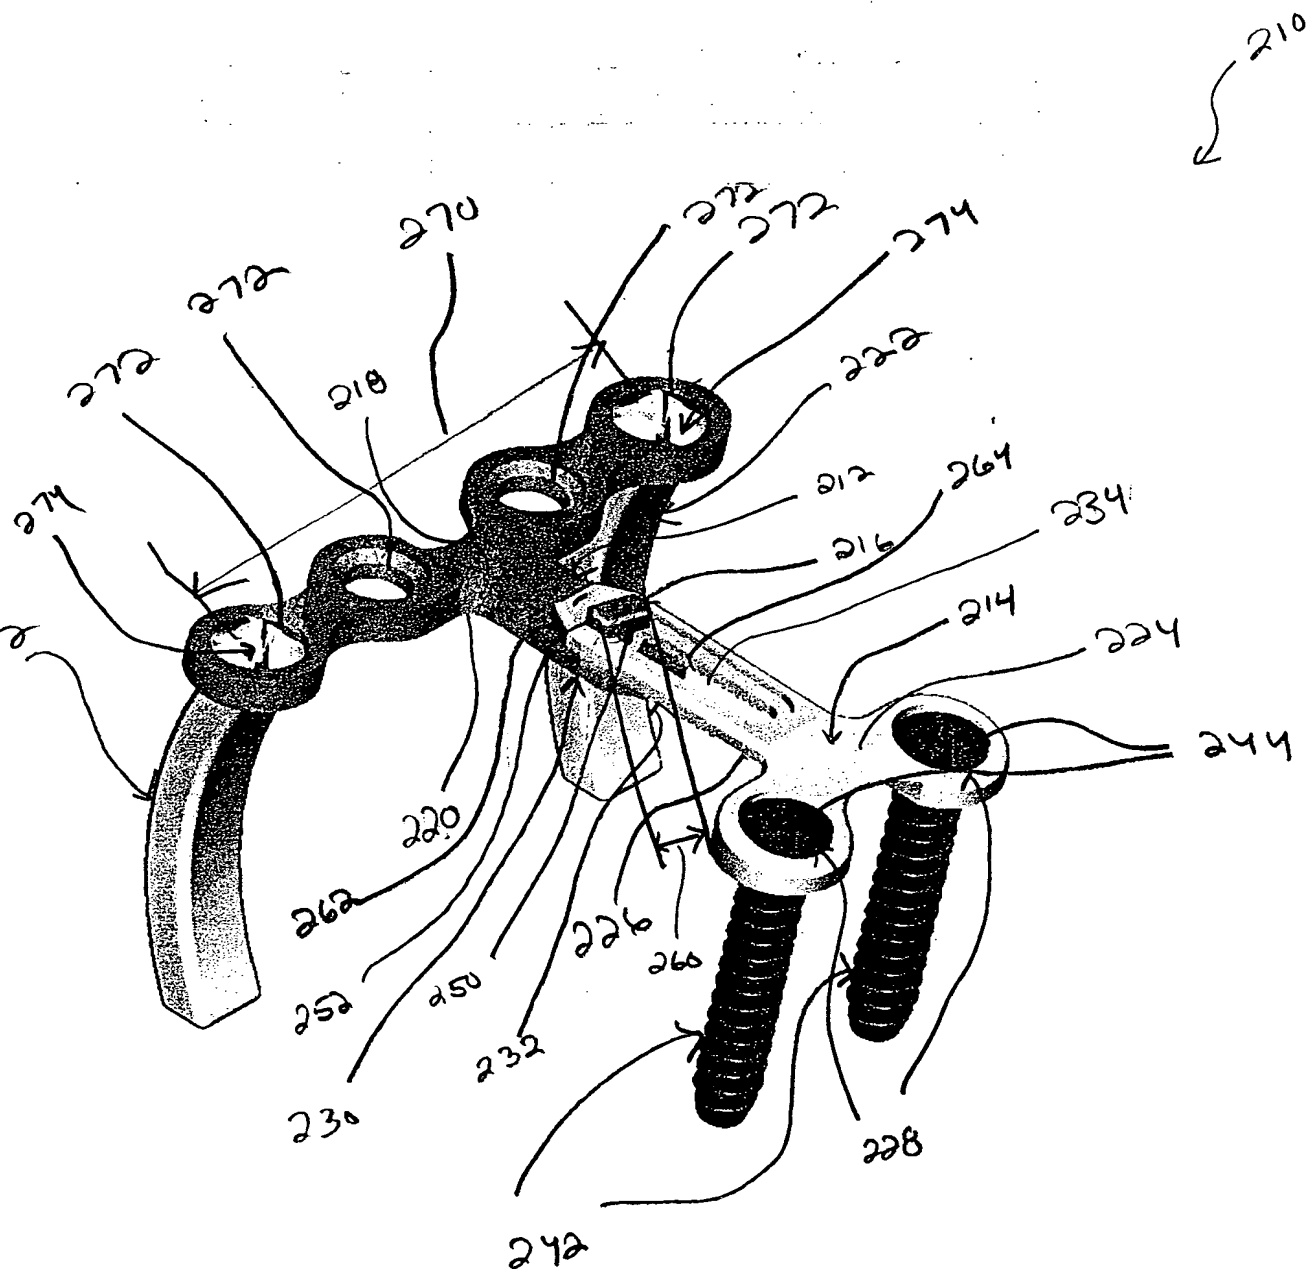



FIG. 16







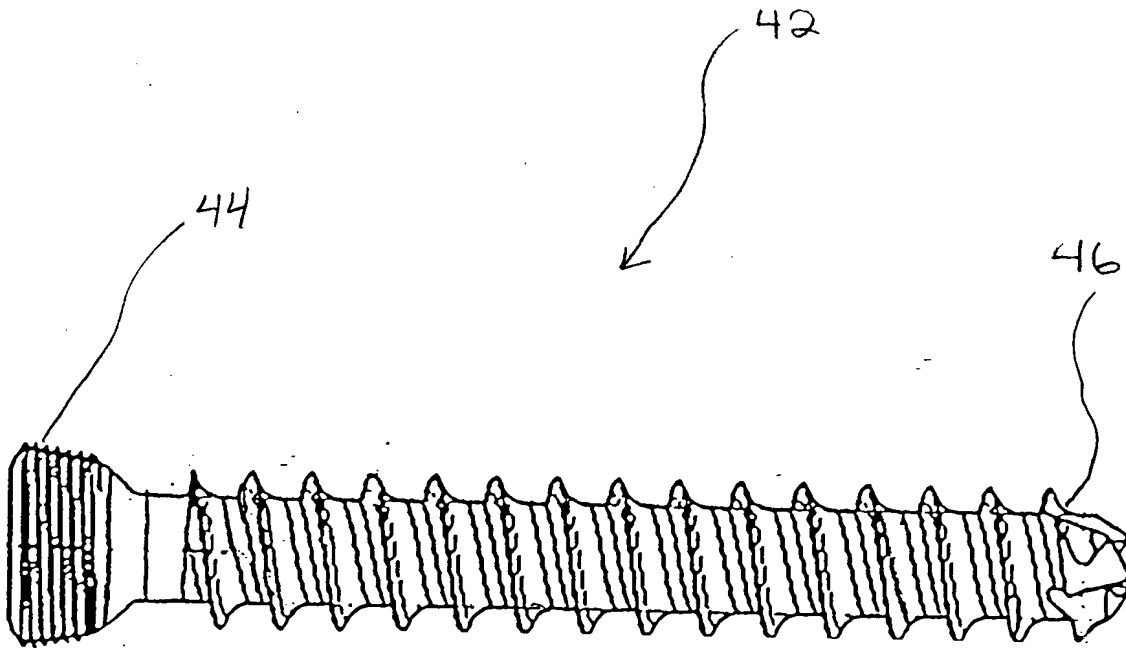


FIG. 19